




HYDRAULICKÁ VYPROŠŤOVACÍ ZAŘÍZENÍ



Pohonné jednotky	Motor	Pracovní tlak (bar)	Olejevá náplň (l)	Hadice (m)	Hmotnost (kg)
V 400 S	4tákní benzínový; 1,5 kW	630/700	2,5	-	17,3
E 400 S	Elektro-Motor 220V, 50 Hz, 0,5 kW	630/700	2,5	-	20,5
V 400 ECO	4tákní benzínový; 1,5 kW	630/700	2,5	-	17,3
V 50 S	4tákní benzínový; 2,9 kW	630/700	4,0	-	31,4
V 50 Eco	4tákní benzínový; 2,2 kW	630/700	4,0	-	29,9
V EcoSilent	4tákní benzínový; 2,2 kW	630/700	2,7	-	24,9
E-COMPACT	Elektro 230V-50Hz; 1,5 kW	630/700	2,8	-	11,5
V-ECOCOMPACT	4tákní benzínový; 2,2 kW	630/700	3,8	-	23,9
E 50-T + SAH 20	Elektro 230V-50Hz; 1,3 kW	630/700	4,0	2x20	44/73
V 50-T + SAH 20	4tákní benzínový; 2,6 kW	630/700	4,0	2x20	39/69
E-TriPPle-T + SAH 20	Elektro 230V-50Hz; 1,8 kW	630/700	5,8	2x20	50/85
V-TriPPle-T + SAH 20	4tákní benzínový; 4 kW	630/700	5,8	2x20	45/75
E-MATIC + SAH 20	Elektro 230V-50Hz; 1,3 kW	630/700	4,0	2x20	40/75
V-MATIC + SAH 20	4tákní benzínový; 3 kW	630/700	4,0	2x20	35/72
E 50-T +1 x SAH 20	Elektro 230V-50Hz; 1,3 kW	630/700	4,0	2x20	44/73

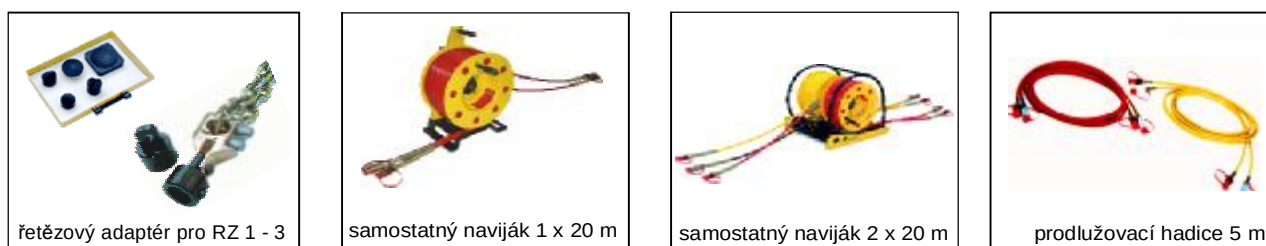

Rozpínací válce	Tlak, síla (kN)	Zákl. délka (mm)	Vysun. délka (mm)	Konc. délka (mm)	Hmotnost (kg)
RZ 1-850	137	530	320	850	11,7
RZ 2-1290	137	750	540	1.290	16,4
RZ 3-1640	137	1.100	540	1.640	19,4
RZ T 2-600	189,4	300	300	600	9,3
RZ T 2-775	189,4	395	380	775	11,5
RZ T 2-1170	189,4	540	630	1.170	15,2
RZ T 2-1500	189,4	650	850	1.500	18,2
RZ T 2-1500 XL	269,4	650	852	1.502	20,9
RZ T 3 - 1310 XL	269,4	480	830	1.310	17,2





HYDRAULICKÁ VYPROŠŤOVACÍ ZAŘÍZENÍ



Rozpínáky	Rozpínací síla (kN)	Zavírací síla (kN)	EN třída	Rozevření (mm)	Hmotnost (kg)
SP 35	38-132	99	AS 35/620-18	620	18,3
SP 43 XL	46-203	74	AS 43/770-21	820	20,5
SP 49	54-330	101	AS 49/650-21	710	20,1
SP 60	68-430	110	BS 63/810-25	810	24,7
SP 80	90-470	102	CS 87/600-25	620	25



Nůžky	Rozevření (mm)	Průměr kulatiny (mm)	Střížná síla (t)	Hmotnost (kg)
S 50-14	50	16	14	4,3
S 140-26	140	25	26	9,2
S 200-49	200	32	49	14,2
C 100-31	120	-	31	19,5
RSX 105-29	105	22	29	9,3
RSX 160-50	163	32	50	14,8
RSX 165-65	165	38	65	16,3
RSX 185-105 All Nine	185	45	105	22,5
RSX 200-107	200	43	107	19,9



Kombi nástroje	Rozevření (mm)	Rozpínací síla v pracovní oblasti (t)	Průměr kulatiny (mm)	Tažná síla (t)	Hmotnost (kg)
SPS 360	360	47-330	30	52	15,5
SPS 400	400	48-726	35	63	18,3
SPS 260 H	260	33-383	25	-	11,3





PNEUMATICKÁ VYPROŠŤOVACÍ ZAŘÍZENÍ

Zvedací vaky 1,0 bar	nosnost (t)	průměr (mm)	výška zdvihu (mm)	objem (l)	váha (kg)
W 6/1	3	610	430	295	8
W 9/1	4,7	780	590	620	10,5
W 13/1	6,7	910	610	900	13
W 24/1	11,9	1220	1000	3010	22,5



Zvedací vaky FLAT BAG 8,0 bar	nosnost (t)	velikost (cm)	výška zdvihu (mm)	objem (l)	váha (kg)
W-FB 7/17	20,3	55x55	170	224	8
W-FB 11/17	25	61x61	170	360	10,6
W-FB 18/19	42	78x78	190	740	17,1
W-FB 32/19	64	91x91	190	1305	23,8



Zvedací vaky 8,0 bar	nosnost (t)	velikost (cm)	výška zdvihu (mm)	objem vzduchu (l)	váha (kg)
W1	1	15 x 15	70	5	0,6
W3	2,8	23 x 23	130	15	1,3
W6	5,8	30 x 30	150	42	2,4
W10	9,6	38 x 38	180	86	4
W13	12,7	45 x 45	220	152	5,3
W 20	20,3	55 x 55	270	296	8
W 25	25	61 x 61	300	400	10,7
W 31	31,4	69 x 69	360	621	13,3
W 41	41	78 x 78	420	921	17
W 52	52	87 x 87	450	1305	21,8
W 66	66	91 x 91	510	1505	24
W 9L	9,6	30 x 45	180	95	3,5
W 14L	13,6	37 x 50	230	170	4,9
W 21L	20,7	37 x 75	230	270	7,4
W 24L	24	32 x 102	200	220	8,5



Těsnící potrubní vaky - průchozí 2,5 bar*	délka (mm)	váha (kg)	průměr těsnění (mm)
RDB 70-150	350	1,7	70-150
RDB 100 - 200	550	2,6	100 - 200
RDB 150 - 200	420	3,2	150 - 200
RDB 150 - 300	590	4,4	150 - 300
RDB 200 - 400	635	6,3	200 - 400
RDB 300 - 525	675	11,9	300 - 525
RDB 350 - 600	865	16,6	350 - 600
RDB 375 - 750	1085	19,7	375 - 750
RDB 500 - 800	1185	31,3	500 - 800



Těsnící potrubní vaky 2,5 bar*	délka (mm)	váha (kg)	průměr těsnění (mm)
RD 40-70	195	0,3	40 - 70
RD 70-150	3355	0,6	70 - 150
RD 150 - 200	575	1,9	150 - 200
RD 200 - 400	635	3	200 - 400
RD 300 - 525	675	6	300 - 525
RD 350 - 600	865	8,4	350 - 600
RD 375 - 750	1085	10,9	375 - 750
RD 500 - 800	1185	17,3	500 - 800

* lze dodat i odolné proti oleji

* lze dodat i odolné proti oleji



Těsnící potrubní vaky - 1,5 bar	délka (mm)	váha (kg)	průměr těsnění (mm)
1,5 BAR RD 100-200	590	4,4	150-300
1,5 BAR RD 150-300	590	4,4	150-300
1,5 BAR RD 200-400	635	6,3	200-400
1,5 BAR RD 300-525	675	11,9	300-525
1,5 BAR RD 350-600	865	16,6	350-600
1,5 BAR RD 375-750	1085	19,7	375-750
1,5 BAR RD 500-800	1185	31,3	500-800
1,5 BAR RD 500-1000	1185	31,3	500-1000
1,5 BAR RD 600-1200	1500	46	600-1200

